
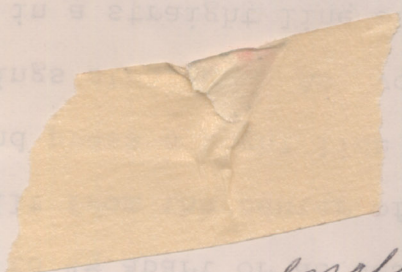


#1 snowflake lg
 #2 bell
 #3 inside snowflake
 (asked for a sample)

#1 lg snowflake
 Bell

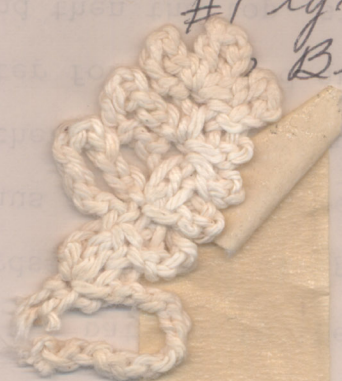

enclosed by 0.4.

INTERVALS EITHER MAY OR ON A DIAGONAL. IF USING THE CROW STITCH, MAKE
 IF YOU ARE GOING TO LIE IN A REGULAR SQUARE KNOT LIE. MAKE A 1/2 INCH
 ESPECIALLY NICE IN SWIM OR SICK OUTLIES.
 BURNING STITCHES THROUGH ALL FOLDS ON THE BATTERED LINES. THIS IS
 A VERY DESIGN ON THE TOP SIDE AND OUTLIED IN A OUTLIED STITCH (SWART
 MAKE THE OUTLIE. IT IS A 1/2 INCH OUTLIE. IT CAN BE MARKED WITH A
 OVERLAP ONE OVER THE OTHER FOR AN EDGE.
 MAKE CERTAIN THE BACK MATCHES IN SIZE THE FRONT. UNLESS YOU PLAN TO
 BATTERED AND SEW A 1/2 INCH SEAM. DO THE SAME FOR THE BACK.
 EXTERIOR FOR THE FRONT. CUT THE FRONT 2 YARD PIECE IN HALF. MATCH
 MATERIAL FOR THE OUTLIE BACK. IF YOU NEED TO MATCH BATTERED, APPROX
 1/2 INCH MATERIAL FOR THE FRONT AND FIVE YARDS OF BROWN OR CONTRASTING
 IF YOU ARE STICKING FROM AROUND. YOU MIGHT NEED FIVE YARDS OF 1/2 INCH
 OUTLIE DIRECTIONS:

from home at 11/10/10
 #1 snowflake