

CASE II-A SOLID WAFER, CONFINED
 COEF. OF FRICTION ≈ 0.04
 $R_c/R_0 = 1.024$, $D/H = 6.5$

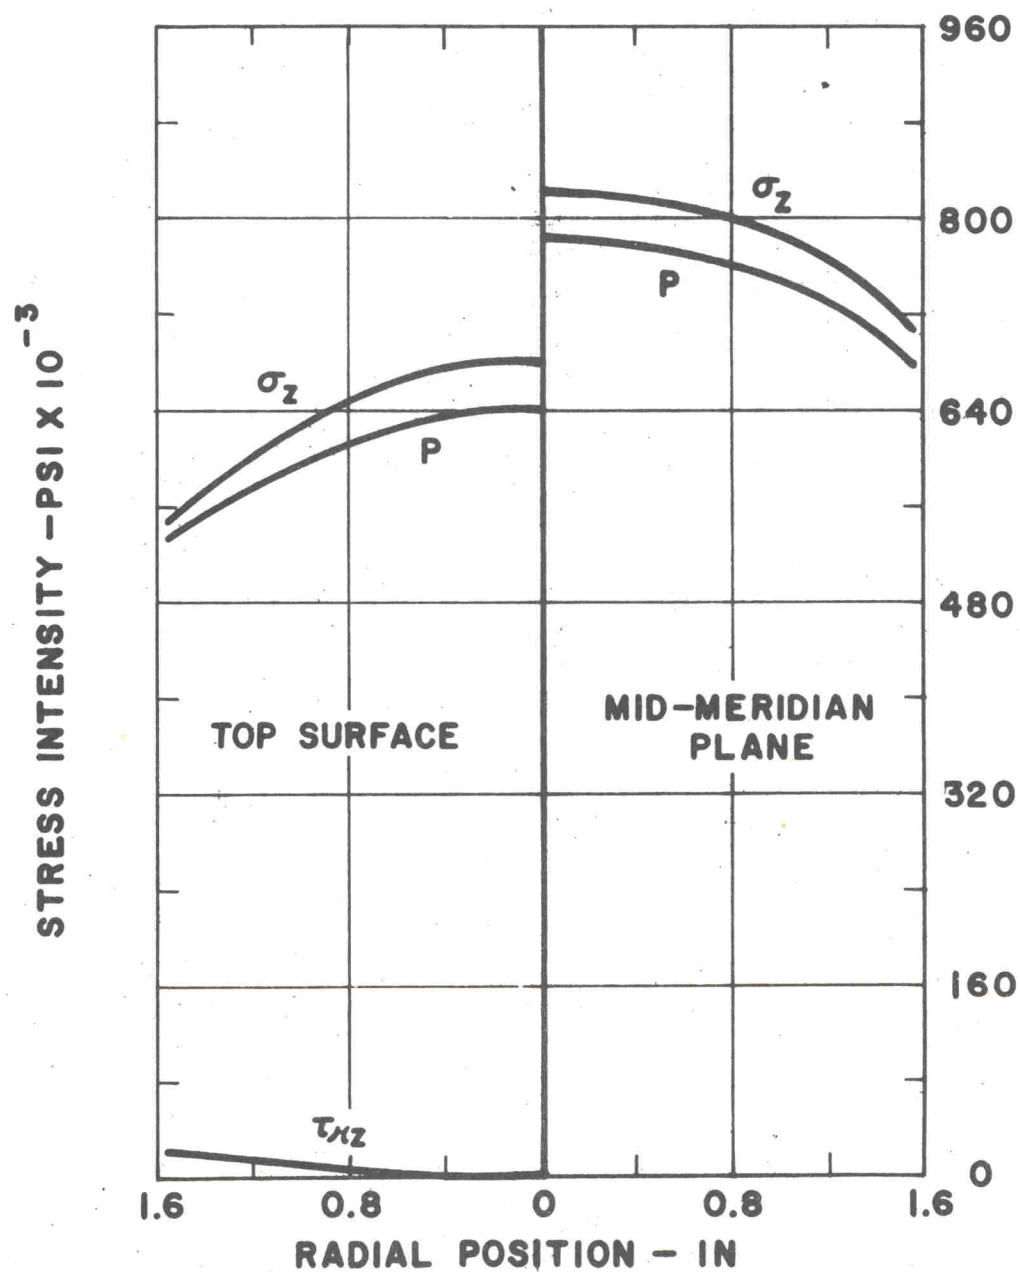


FIG. 16 STRESS DISTRIBUTION FOR 303
 STAINLESS STEEL. CASE II-A
 $D/H = 6.5$