

CASE II-A SOLID WAFER, CONFINED  
 COEF. OF FRICTION = 0.04  
 $R_c/R_0 = 1.024$ ,  $D/H = 6.5$

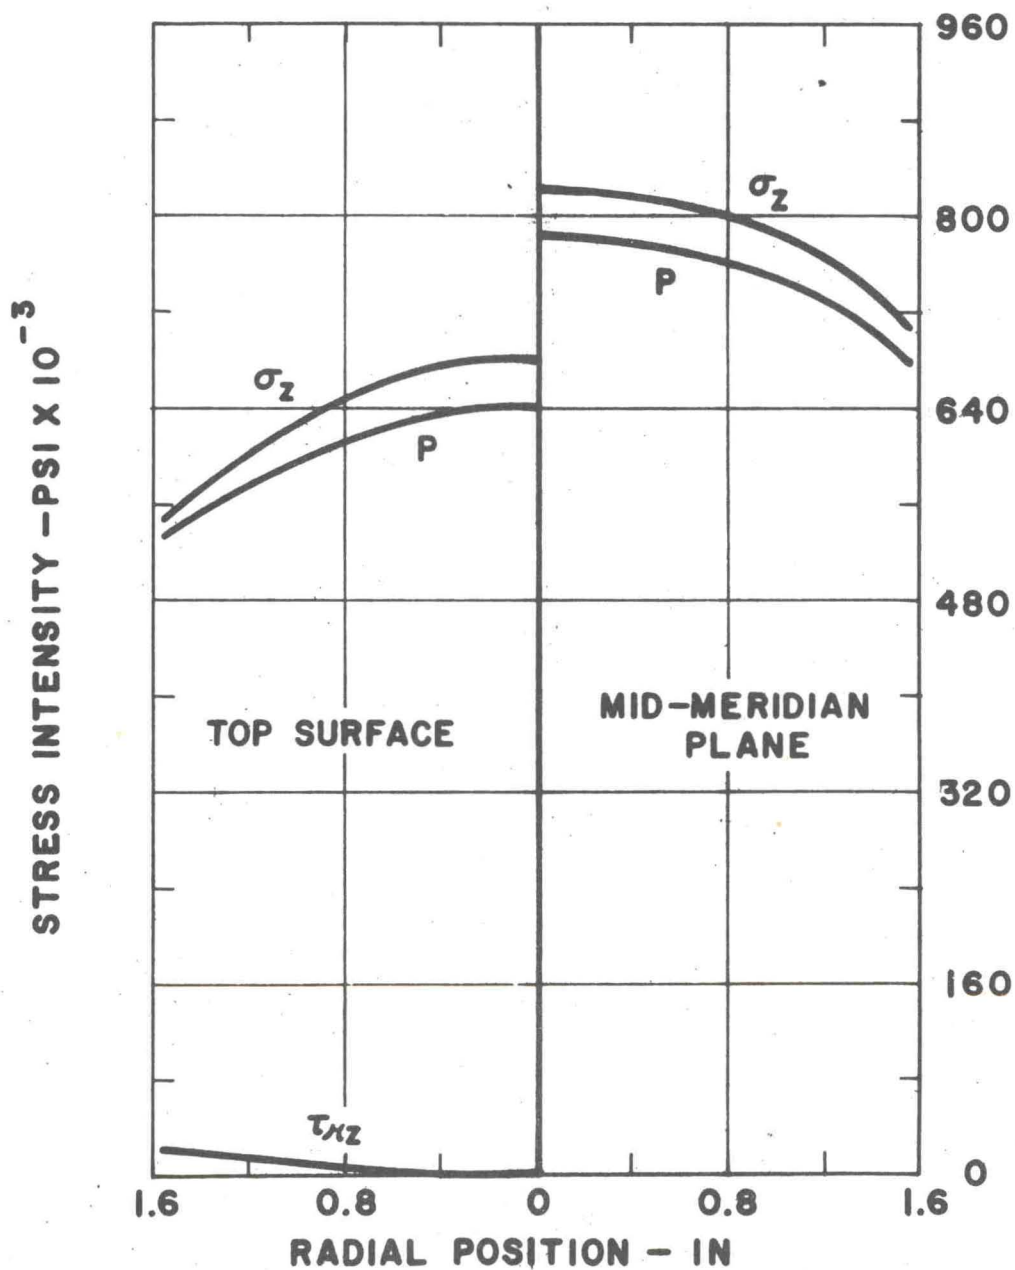


FIG. 16 STRESS DISTRIBUTION FOR 303  
 STAINLESS STEEL. CASE II-A  
 $D/H = 6.5$