

For a rigid wall  $\rho'_0 D_2 \rightarrow \infty$  and eq. (37) becomes

$$(39) \quad \frac{p_2 - p_0}{p_1 - p_0} = \frac{\rho_1 D'_{21} + \rho_0 D_1}{\rho_0 D_1} \xrightarrow{p_1 \rightarrow p_0} 2.$$

For a free surface,  $\rho'_0 D_2 = 0$  and eq. (37) becomes

$$(40) \quad (p_2 - p_0)/(p_1 - p_0) = 0.$$

Equation (37) applies exactly only when the reflected wave is a shock. Because of the second-order contact between the rarefaction branch and the shock branch of the cross curve passing through  $A$ , the formula provides a very good approximation for rarefactions in condensed materials.

Figure 11: Weak-shock approximation: Equations (32) and (35) yield very nearly the same curve when  $(V_0 - V)/V_0 \leq 0.15$ . Then either can be used and the  $(p, u)$  plane can be mapped with a set of identical curves and their mirror images. These curves can be regarded as transformations from the  $(x, t)$  plane. A curve along which transitions can be made by forward-facing waves is an image of a  $C$ -characteristic and is called a  $\Gamma_-$  characteristic.

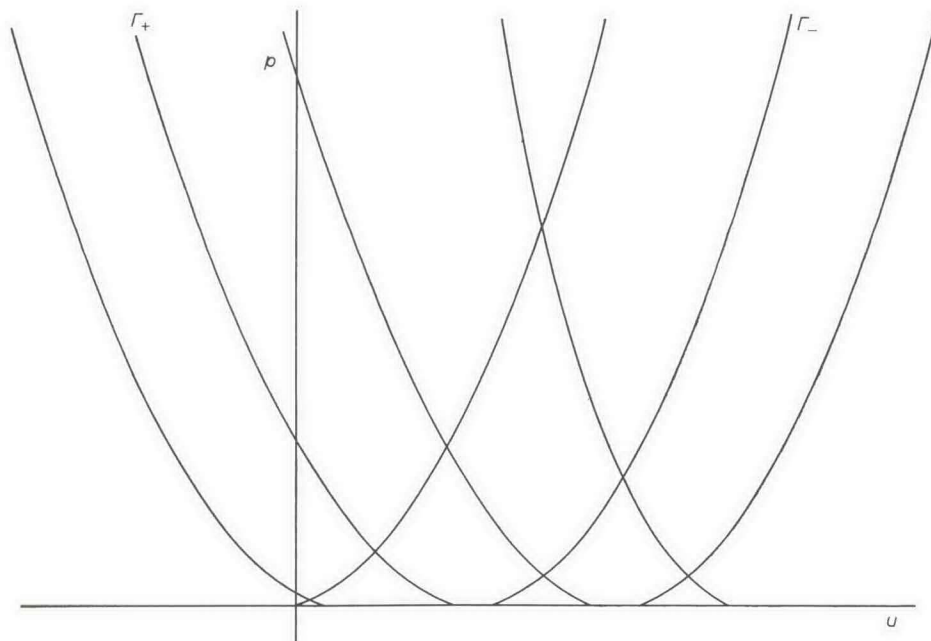


Fig. 11. - Weak shock approximation,  $S = \text{const}$ . No distinction between adiabat and Hugoniot;  $(p-u)$  plane can be mapped with images of the  $C+$  and  $C-$  characteristics.  $u-l = \text{const}$  on  $\Gamma_-$ ,  $u+l = \text{const}$  on  $\Gamma_+$ .

Transitions through backward-facing waves are along  $\Gamma_+$  characteristics. Transformation from the  $(x, t)$  to the  $(x, u)$  plane is not necessarily one-one. For example, a region of uniform state in the  $(x, t)$  plane maps into a single point in the  $(p, u)$  plane; a simple wave in the  $(x, t)$  plane maps into one of the  $\Gamma$  characteristics.

An example of application of the characteristic mapping of the  $(p, u)$  plane in the weak shock approximation is shown in Fig. 12. A forward-facing rarefaction travels into a uniform state

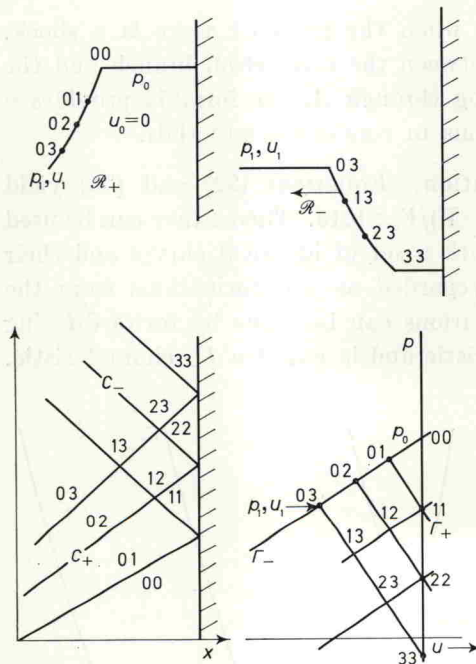


Fig. 12. - Rarefaction on a rigid wall.

through 01 and the  $u=0$  axis. Similarly the transition from 02 to 12 takes place along a  $\Gamma_+$  characteristic and terminates at  $u=0$ . The intermediate state 12 is reached via a backward-facing wave from 02 and a forward-facing wave from 11, etc. This simple step by step procedure will succeed in unraveling the most complicated flow problems in  $(x, t)$  geometry provided only that the weak shock approximation is valid. With the aid of a large drawing board and considerable patience, the procedure is useful for graphical computation; and the solution of a few problems by this means is certain to establish the elements of finite amplitude wave propagation firmly in the mind of the student. It should be noted that the  $C$  characteristics are actually curved in the region of interaction, and the slopes of those characteristics

reduction travels into a uniform state  $(p_0, u_0=0)$  bounded by a rigid wall, reducing it to the uniform state  $(p_1, u_1)$ . The reflection process is represented in the  $(x, t)$  plane by drawing  $C+$  and  $C-$  characteristics at arbitrarily close intervals and labelling the fields between the characteristics as shown. In relating this flow to the  $(p, u)$  plane, each field in the  $(x, t)$  plane is considered a region of uniform state, represented by a single point in the  $(p, u)$  plane. Thus the regions 00, 01, 02, 03 map into the points 00, 01, 02, 03 on the  $\Gamma_-$  characteristic ( $u-l=l_0$ ) passing through  $(p_0, u_0=0)$ . Region 11 in  $(x, t)$  is reached from 01 across a backward-facing wave, therefore it lies on a  $\Gamma_+$  characteristic passing through 01. The rigid boundary condition  $u=0$  must be satisfied in 11, therefore 11 in  $(p, u)$  lies at the intersection of the  $\Gamma_+$