Cornell-Dubilier CD30F103J Capacitor	0.01 μF $\pm$ 5% 500 VDCW	Mica, dipped Rectangular Radial lead 0.8 x 0.89 x 0.34" th.

SOAK PERIOD: 16 hours at 10,000 psig.
MECHANICAL: No apparent damage.
ELECTRICAL: All components indicated less than 10% change.

Cornell-Dubilier HCC3224P Capacitor	0.22 μF 3 VDCW	Ceramic, tear drop Phenolic coated Wax impreg.

SOAK PERIOD: 16 hours at 8,000 psig.
MECHANICAL: No apparent damage.
ELECTRICAL: All components indicated less than 10% change.

MFG.-CORNING
TYPE-CAPACITOR
DESCRIPTION-CYFM10

CHART NO. 45
NO. OF SAMPLES TESTED-20

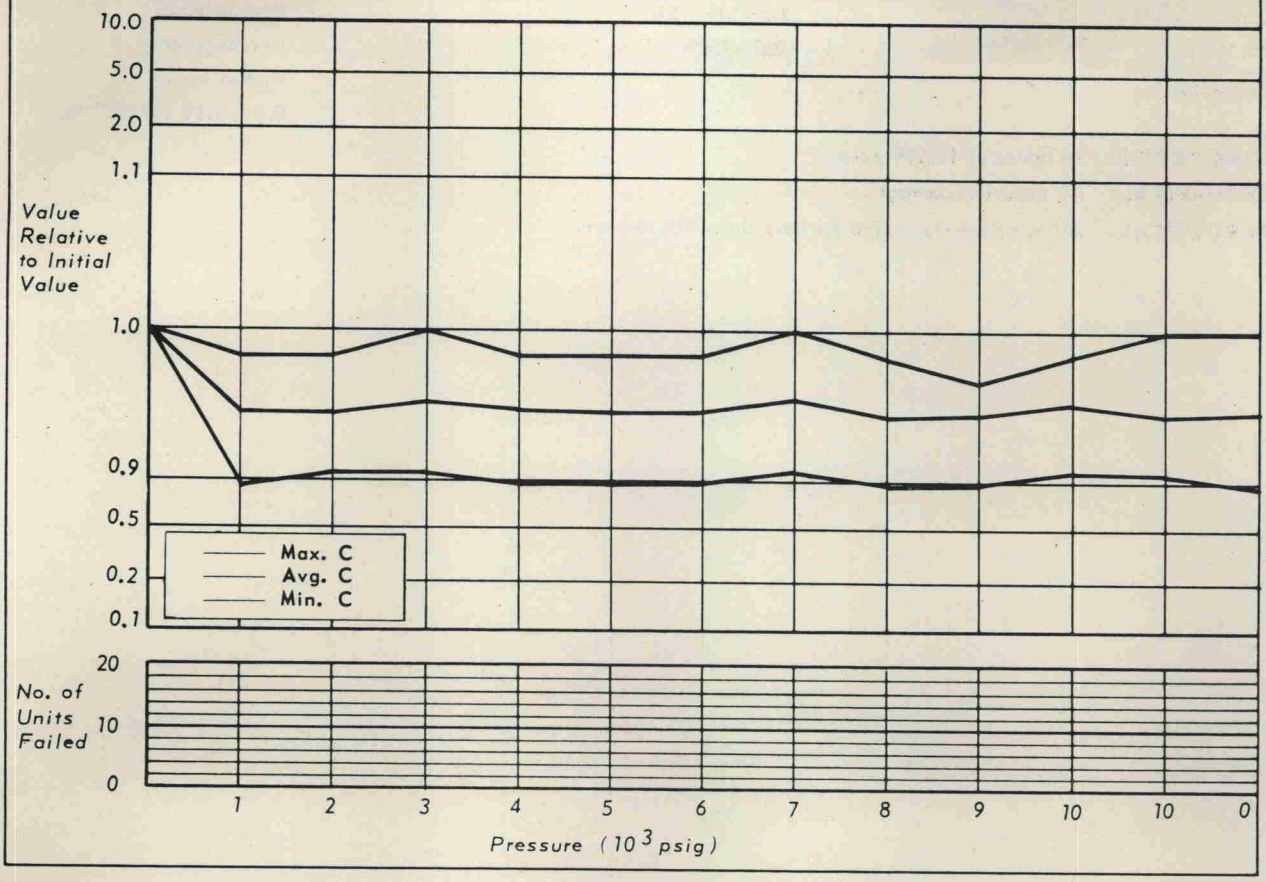

MFG.-CORNING
TYPE-CAPACITOR
DESCRIPTION-CYFM15

CHART NO. 46
NO. OF SAMPLES TESTED-19

