

Motorola
1N 4005
Diode, rectifier


PIV = 600 V
 $I_{dc \text{ avg.}} = 1 \text{ Amp}$

Plastic encap
Passivated
Tubular, axial lead
0.18 x 0.1" diam

SOAK PERIOD: None
MECHANICAL: No apparent damage.
ELECTRICAL: All components indicated less than 10% change.

MFG. - MOTOROLA
TYPE - DIODE
DESCRIPTION - IN3043

CHART NO. 76
NO. OF SAMPLES TESTED - 20

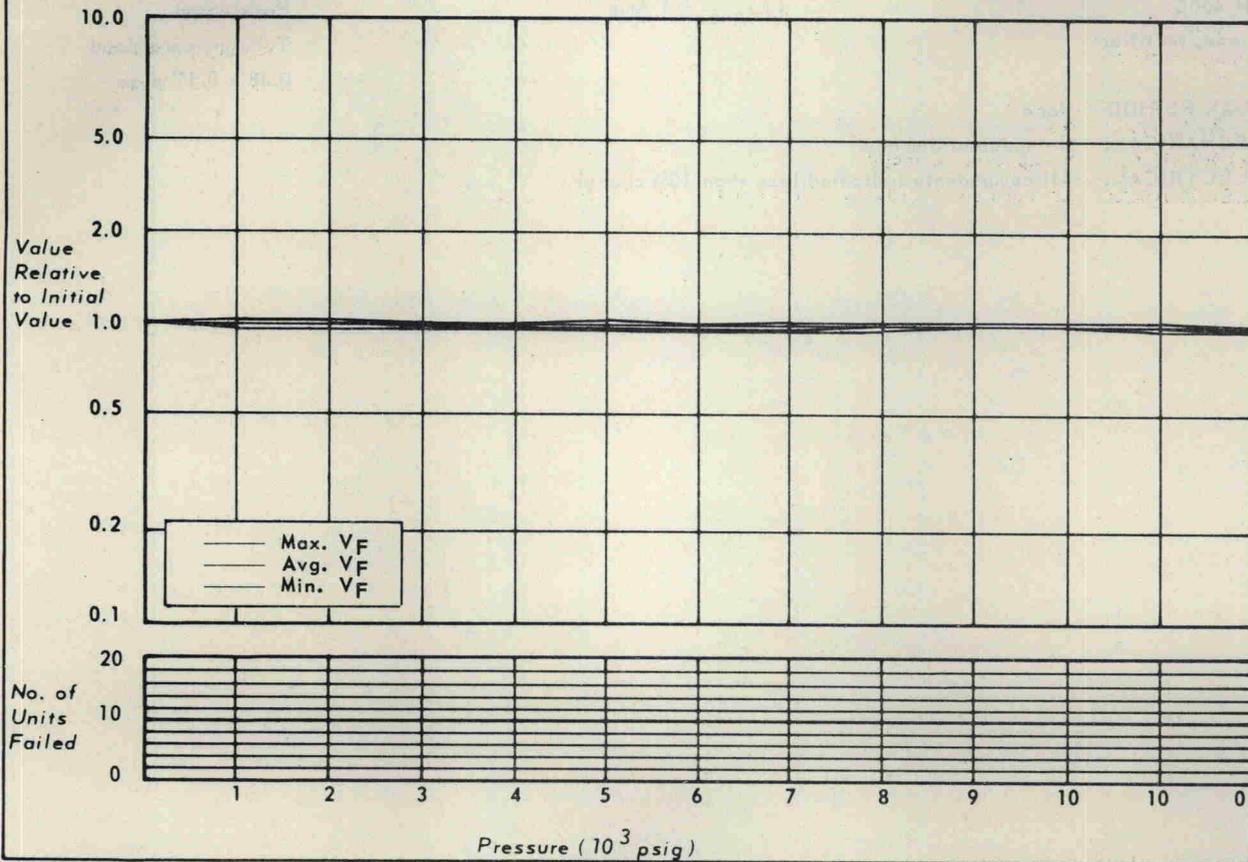

MFG.
TYPE
DESCRIPTION

CHART NO. 76 A
NO. OF SAMPLES TESTED

