Sylvania	PIV = 200 V	Silicon
1N 2069	$I_{dc\ avg.}$ = 750 mA	Epoxy, encap
Diode, rectifier		Bullet type


SOAK PERIOD: None

MECHANICAL: No apparent damage.

ELECTRICAL: All components indicated less than 50% and greater than 10% change.

MFG. - SYLVANIA
TYPE - DIODE
DESCRIPTION - DF28

CHART NO. 82
NO. OF SAMPLES TESTED - 17

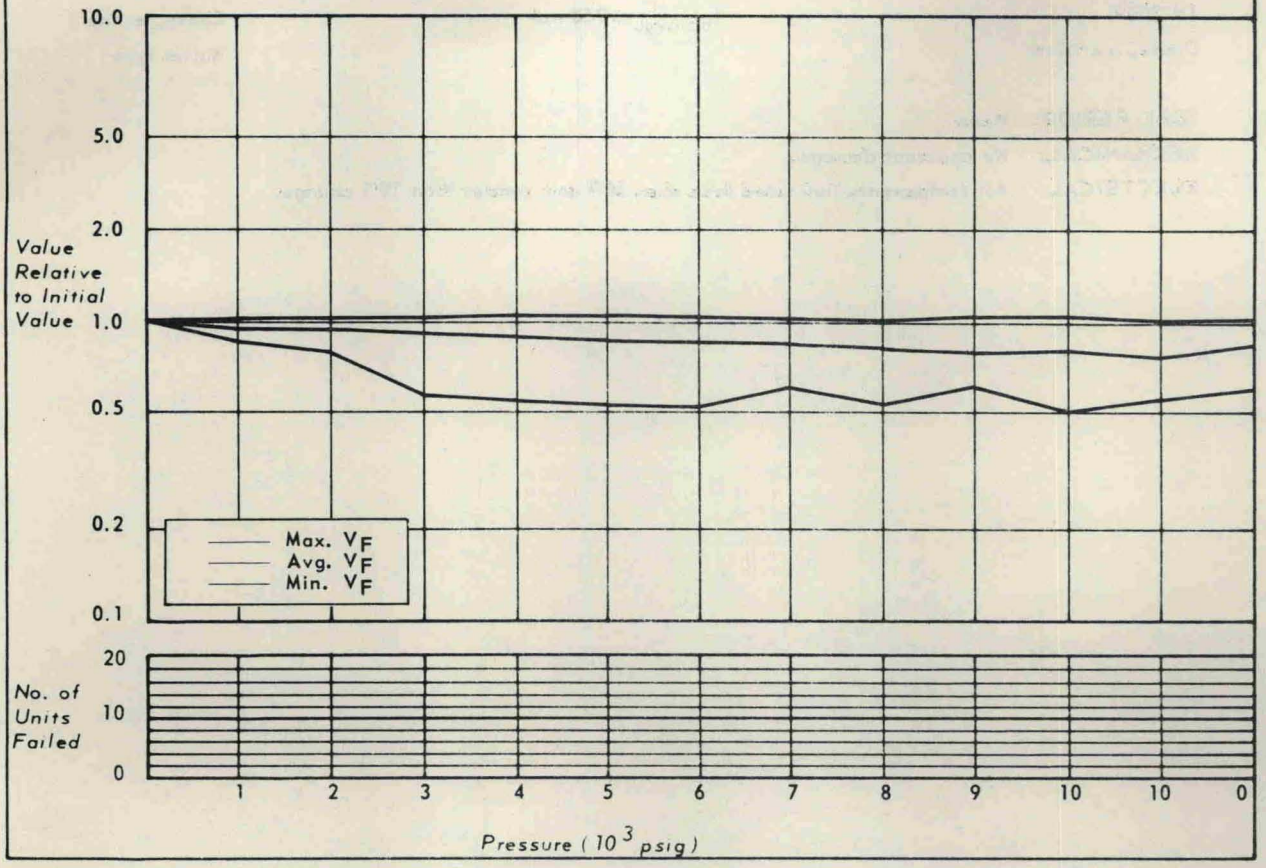

MFG.
TYPE
DESCRIPTION (SAME AS ABOVE)

CHART NO. 82A
NO. OF SAMPLES TESTED

