

Allen-Bradley
CAH 10000 FY
Resistor

1 K Ω \pm 1%
15.81 V max
0.25 W

Metal film, herm sealed
Tubular, axial lead
0.56 x 0.225" diam.

SOAK PERIOD: None

MECHANICAL: No apparent damage.

ELECTRICAL: Eighteen components indicated less than 10% change.

FAILURES: Two components indicated a permanent change greater than 50% at the pressures shown on the failure graph on opposite page.

Allen-Bradley
CAH 98802 FY
Resistor

988 K Ω \pm 1%
300.0 V max
1 W

Metal film, herm sealed
Tubular, axial lead
0.56 x 0.225" diam

SOAK PERIOD: None

MECHANICAL: Visual inspection after completion of test showed a crack in the ceramic case of one component. This component functioned normally throughout the test.


ELECTRICAL: Eighteen components indicated less than 10% change.

FAILURES: Two components indicated a permanent change greater than 50% at the pressures shown on the failure graph on opposite page.



MFG. - ALLEN BRADLEY
TYPE - RESISTOR
DESCRIPTION - EAH 10000FY

CHART NO. 103
NO. OF SAMPLES TESTED - 19

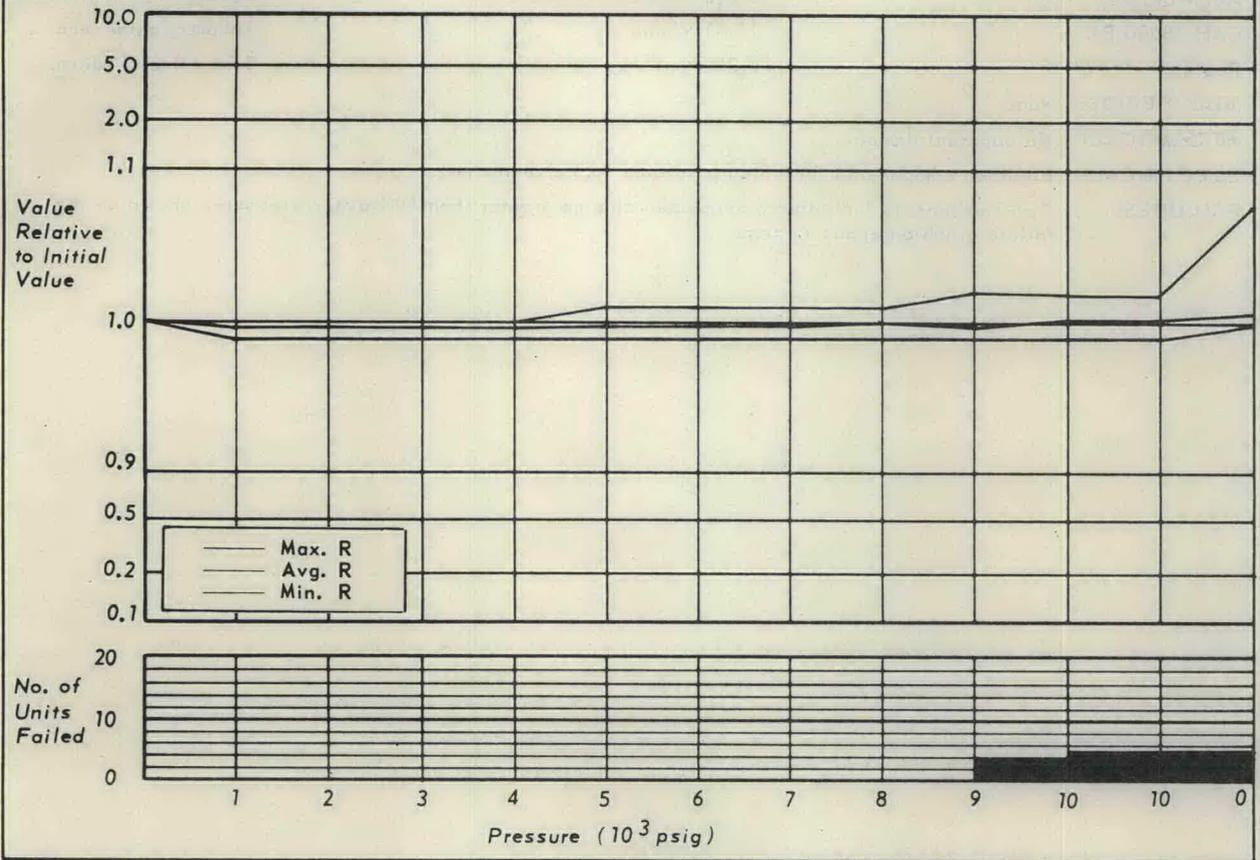

MFG. - ALLEN BRADLEY
TYPE - RESISTOR
DESCRIPTION - EAH 10001FY

CHART NO. 104
NO. OF SAMPLES TESTED - 20

