



DRILL $\frac{1}{16}$ " DIA & C' BORE
DIA $\times \frac{1}{4}$ " DEEP

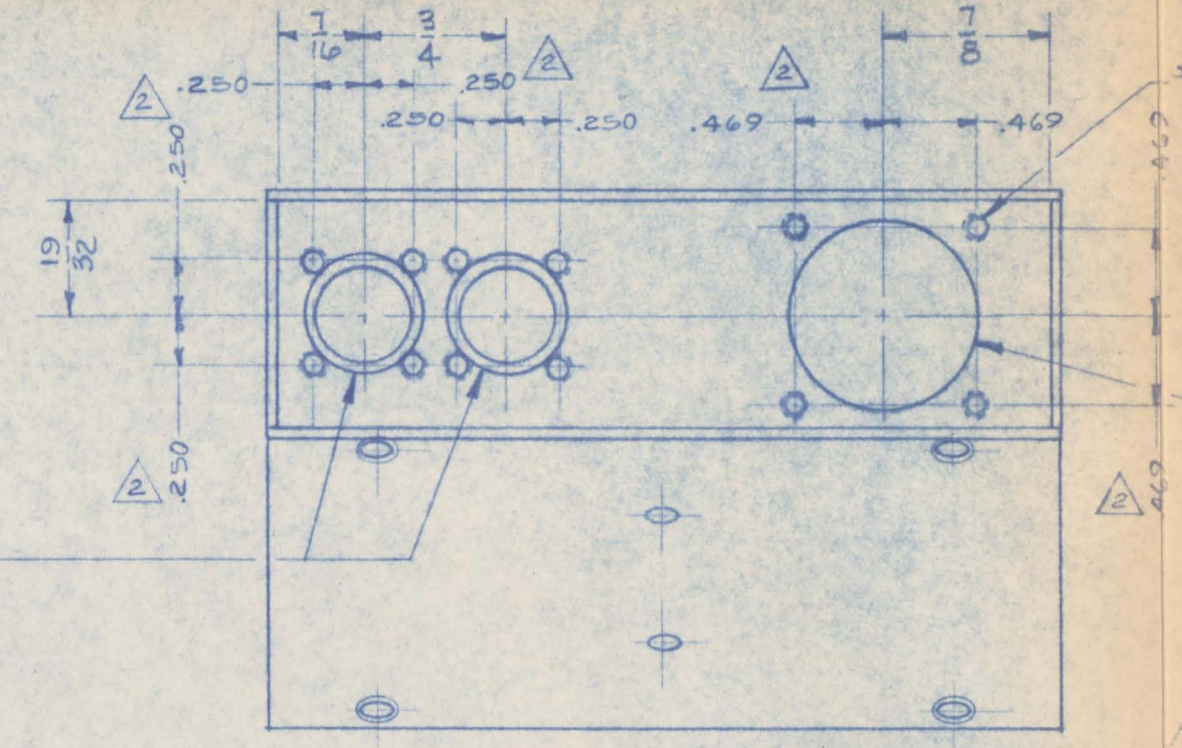

#4-40UNC-2B 12 HOLES


$\frac{1}{16}$ " DIA

DRILL & TAP #6-32UNC-2B $\times \frac{1}{4}$ " DEEP
16 HOLES & C'SINK 82° TO $\frac{1}{4}$ " DIA.

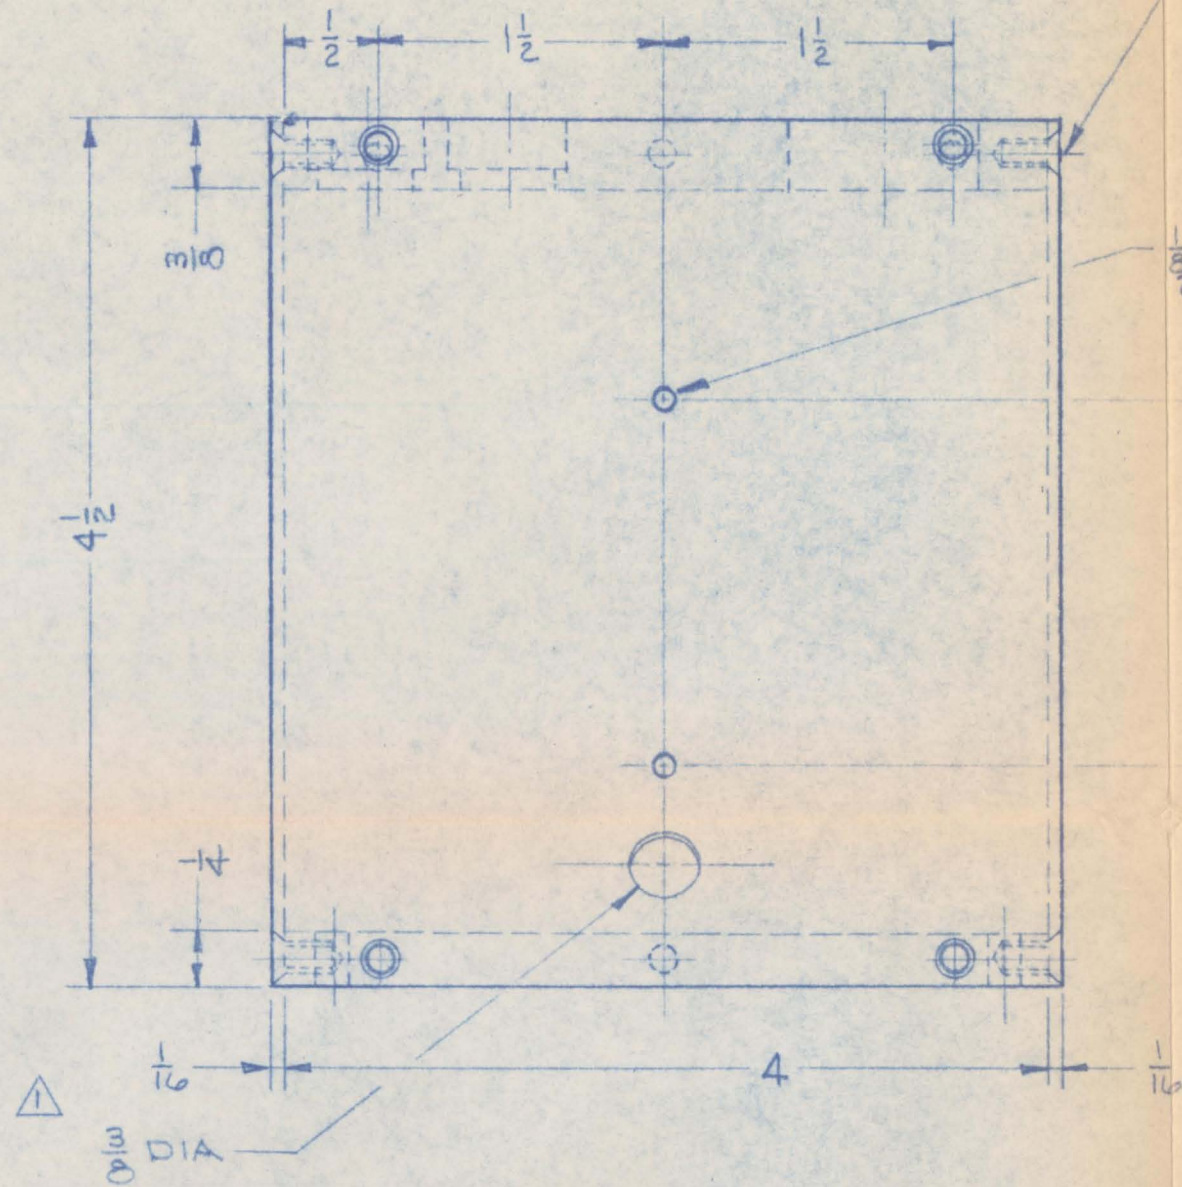


$\frac{1}{16}$ " DIA
2 HOLES

BRASS

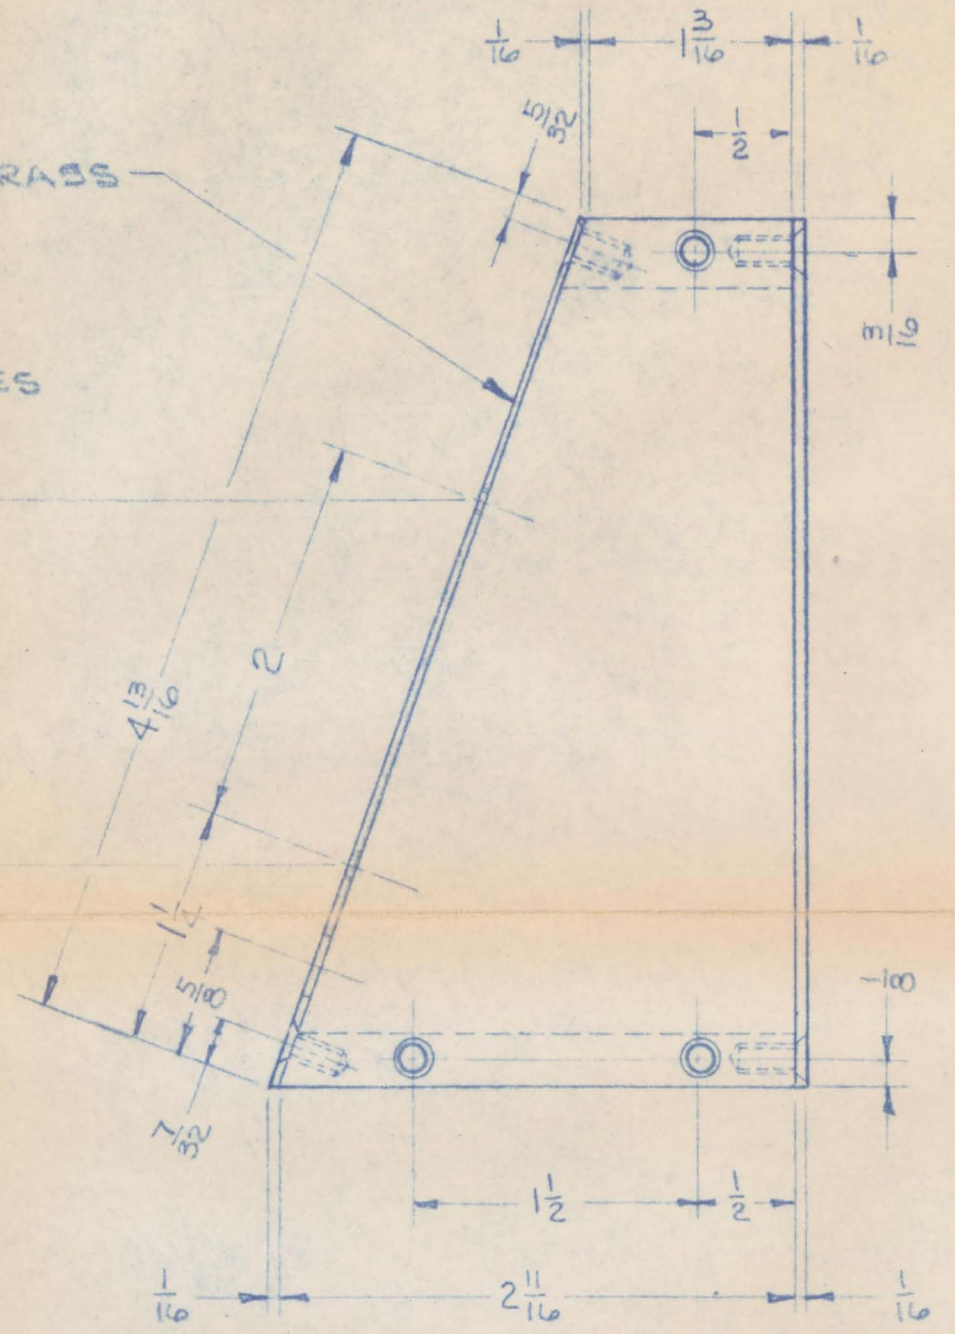

$\frac{1}{4}$ " DIA.
(TYP.)

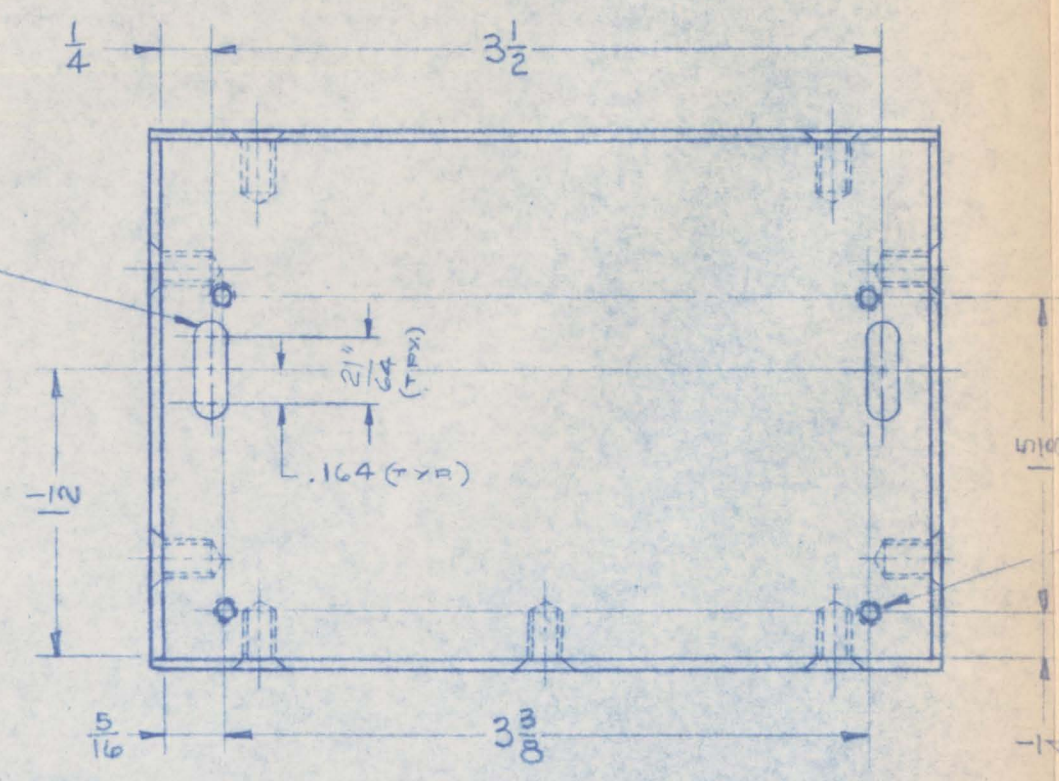

#4-40UNC-2B - 4 HOLES

MAT'L: ALL ALUMINUM EXCEPT BRASS
COVER AS SHOWN

NEXT ASSY C-532

UNLESS OTHERWISE SPECIFIED
TOLERANCE: FRACTIONS $\pm \frac{1}{64}$, DECIMALS $\pm .005$
BREAK SHARP CORNERS AND EDGES $.005 R$ ALL OVER.
SURFACE FINISH 63 ALL OVER.

REV. 1	ADDED $\frac{3}{8}$ " DIA HOLE	12-2-63	REF. No.	
REV. 2	ADDED C' BORE		REF. No.	
REV. 3	ADDED C' SINK & SLOT	6-14-64	REF. No.	



McCARTNEY MFG. CO.
BAXTER SPRINGS KANSAS

ENCLOSURE FOR ELECTRONICS
EQUIPMENT

SCALE	FULL	DATE	7-23-63
MATL	NOTED	HEAT TREAT	DWG. LEP
CATALOG No.		PART No.	APPRD.
		DWG. No.	C-530