




$\frac{37}{64} \times \frac{3}{4}$ SLOT

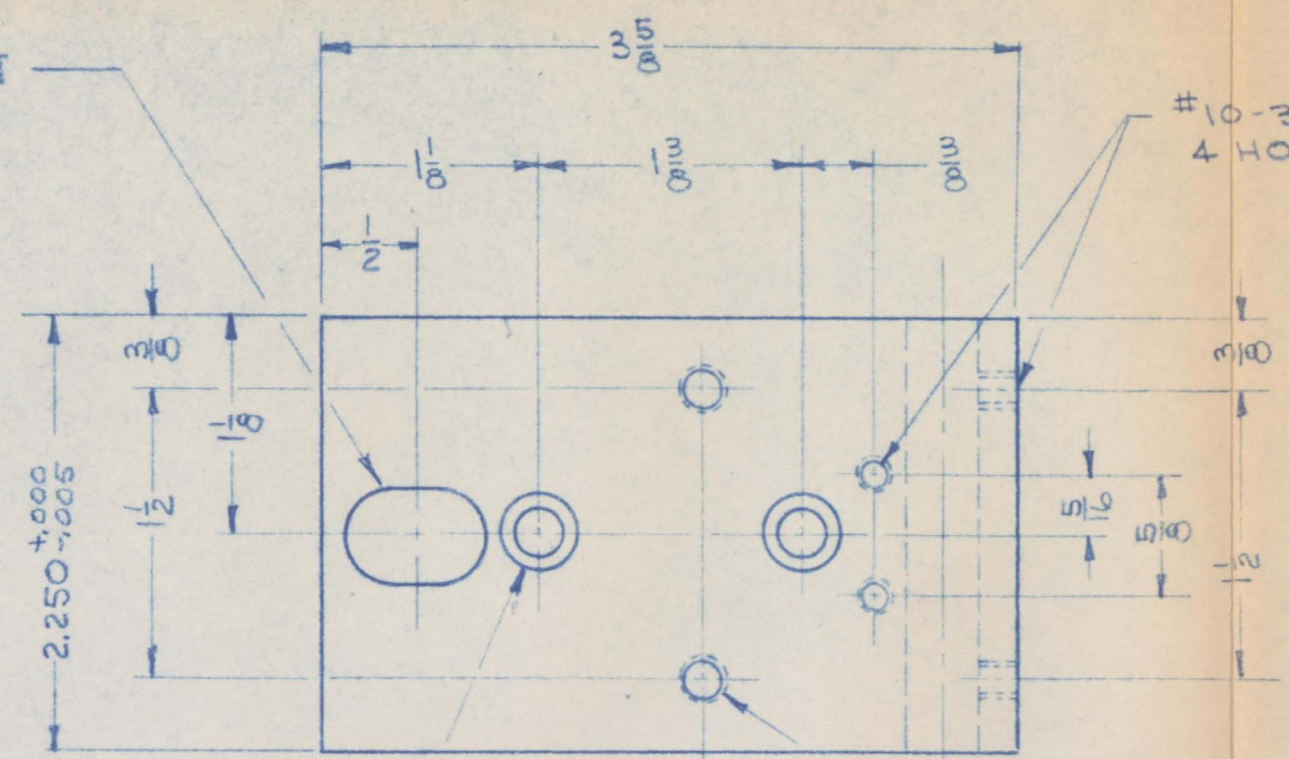

#10-32UNF-2B
4 HOLES

DRILL $\frac{1}{4}$ DIA & BORE $\frac{13}{32}$ DIA
 $\times \frac{9}{32}$ DEEP - 2 HOLES

$\frac{1}{4}$ -20UNC-2B
2 HOLES

REAM .3750 $\pm .0007$
 $-.0000$ DIA



FULL R

MAT'L: ALUMINUM

NEXT ASSY C-536



McCARTNEY MFG. CO.
BAXTER SPRINGS KANSAS

X-RAY TUBE HOLDER BRACKET

UNLESS OTHERWISE SPECIFIED
TOLERANCE: FRACTIONS $\pm \frac{1}{64}$, DECIMALS $\pm .005$
BREAK SHARP CORNERS AND EDGES $\frac{1}{64} R$ ALL OVER.
SURFACE FINISH 63 ALL OVER.

REV. Δ	$\frac{37}{64}$ " WAS $\frac{1}{2}$ "	6-9-64 P.S.	REF. No. Δ
REV. Δ			REF. No. Δ
REV. Δ			REF. No. Δ

SCALE	FULL	DATE	7-24-63
MATL	NOTED	HEAT TREAT	DWG. LEP
CATALOG No.		PART No.	APPRD.
		DWG. No.	B-1303

REV. #1