



DRILL  $\frac{7}{32}$  DIA & C'BORE  
 $\frac{21}{64}$  DIA X  $\frac{33}{16}$  DEEP - 2 HOLES

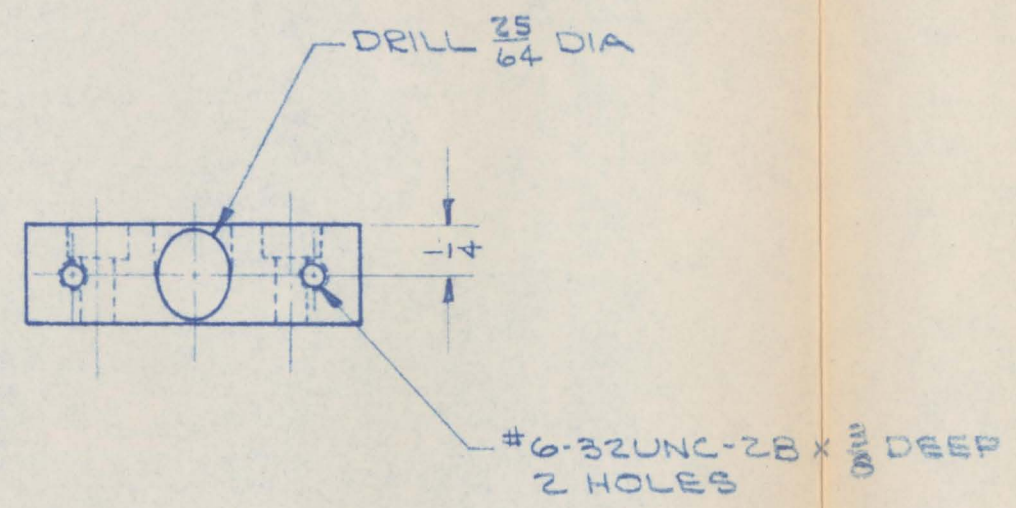

MAT'L: FREE CUTTING COPPER

NEXT ASSY B-1316

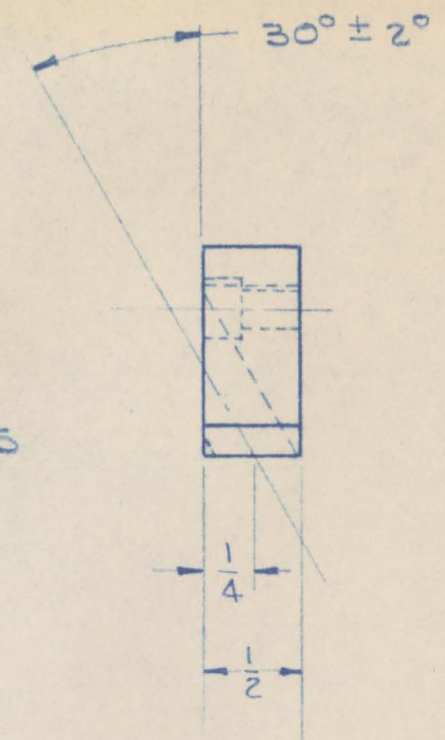

McCARTNEY MFG. CO.  
 BAXTER SPRINGS KANSAS

ELECTRICAL TERMINAL

UNLESS OTHERWISE SPECIFIED  
 TOLERANCE: FRACTIONS  $\pm \frac{1}{64}$ , DECIMALS  $\pm .005$   
 BREAK SHARP CORNERS AND EDGES  $\frac{1}{64} R$  ALL OVER.  
 SURFACE FINISH  $\frac{125}{\sqrt{}}$  ALL OVER.

REV. $\Delta$	REF. No. $\Delta$
REV. $\Delta$	REF. No. $\Delta$
REV. $\Delta$	REF. No. $\Delta$

SCALE FULL	DATE 7-31-63
MATL NOTED	HEAT TREAT DWG. LEP
CATALOG No.	PART No. APPRD.
	DWG. No. B-1315