


.2497 ± .0001 DIA

GROOVE .028 $\begin{smallmatrix} +.003 \\ -.000 \end{smallmatrix}$ WIDE X .015 ± .002 DEEP
TYP. BOTH ENDS

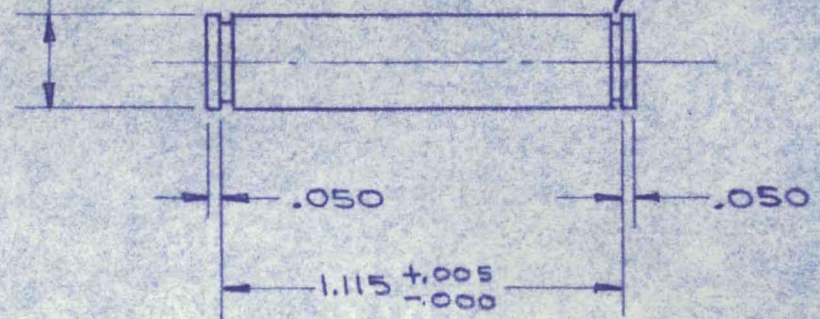

MAT'L: STAINLESS STEEL TYPE 416
FINISH: PASSIVATE

REF. GENERAL MILLS
DWG. 533020



McCARTNEY MFG. CO.
BAXTER SPRINGS KANSAS

BEARING SHAFT

UNLESS OTHERWISE SPECIFIED

TOLERANCE: FRACTIONS _____, DECIMALS $\pm .005$
BREAK SHARP CORNERS AND EDGES _____ ALL OVER.
SURFACE FINISH _____ ALL OVER.

REV. Δ	REF. No. Δ
REV. Δ	REF. No. Δ
REV. Δ	REF. No. Δ

SCALE TWICE SIZE	DATE 10-2-63
MATL NOTED	HEAT TREAT
	DWG. LEP
	PART No.
CATALOG No.	APPRD.
	DWG. No. A-1451

LP