


THIS SURFACE TO BE  
FLAT WITHIN .005 T.I.R.



MAT'L: 4140 OR 4340  
ALLOY STEEL  
HEAT TREAT: Rc 28-32

REF. GENERAL MILLS  
DWG 533025

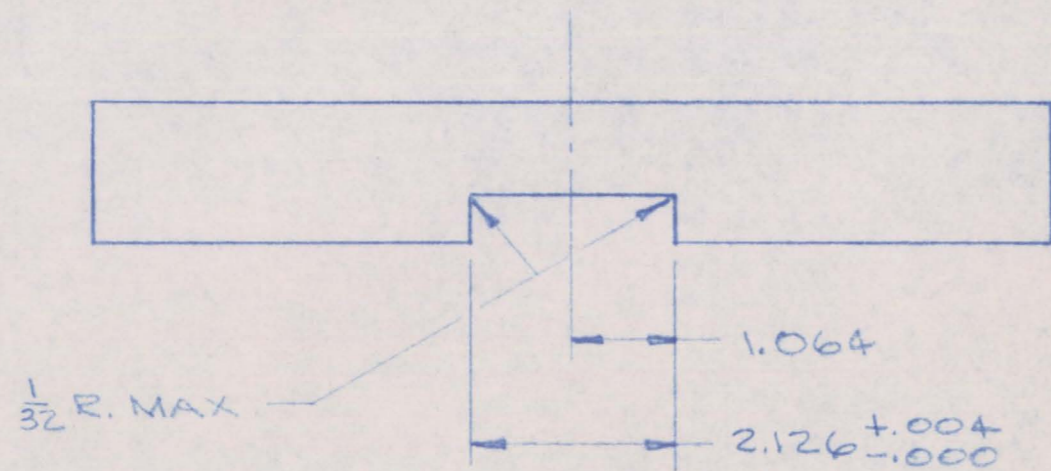

McCARTNEY MFG. CO.  
BAXTER SPRINGS KANSAS

NEXT ASSY. D-320 & D-321

UNLESS OTHERWISE SPECIFIED  
TOLERANCE: FRACTIONS  $\pm$  1/64, DECIMALS  $\pm$ .005  
BREAK SHARP CORNERS AND EDGES .010R ALL OVER.  
SURFACE FINISH  $\frac{125}{125}$  ALL OVER.

REV. $\Delta$	13/16" C-BORE WAS	5-23-64	REF. $\Delta$
REV. $\Delta$	13/16" C-BORE	2.7	REF. $\Delta$
REV. $\Delta$			REF. $\Delta$
REV. $\Delta$			REF. $\Delta$

POLE END  
TRACK SUPPORT

SCALE HALF SIZE	DATE 10-8-63
MATL NOTED	HEAT TREAT NOTED
	DWG. LEP
	APPRD.
CATALOG No.	DWG. No. C-554