
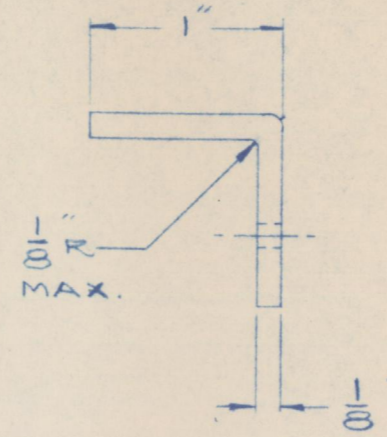


DRILL $\frac{5}{32}$ " DIA. THRU
(2 HOLES)

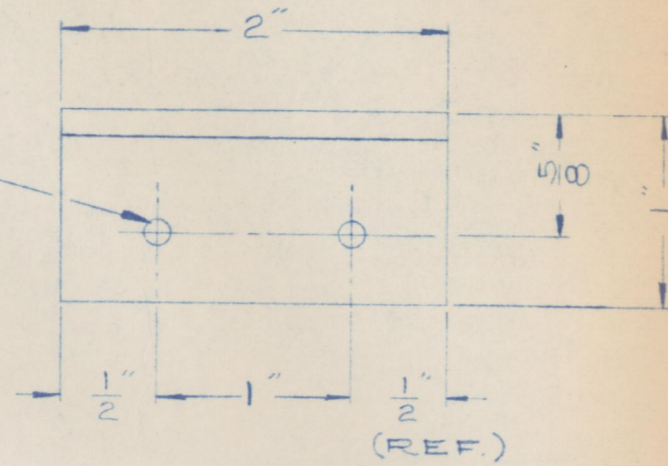

NOTES

MAT'L: $\frac{1}{8}$ " THK. PLEXI-GLASS
8 REQ'D

NEXT ASSY D-320



McCARTNEY MFG. CO.
BAXTER SPRINGS KANSAS

MICRO SWITCH COVERS

UNLESS OTHERWISE SPECIFIED
TOLERANCE: FRACTIONS $\pm \frac{1}{64}$ ", DECIMALS $\pm .005$
BREAK SHARP CORNERS AND EDGES $.015R$ ALL OVER.
SURFACE FINISH — ALL OVER.

REV. Δ	REF. No. Δ
REV. Δ	REF. No. Δ
REV. Δ	REF. No. Δ

SCALE FULL	DATE 6-4-64
MATL NOTES	HEAT TREAT — PART No. — DWG. J. BERRY
CATALOG No. —	APPRD. — DWG. No. B-1459